

T-CON Product Portfolio

Engineered for projects that demand more.

Innovation in specialty mortars and construction
chemicals to deliver reliability and efficiency to
your project.





Welcome to
the evolution
of construction

www.t-con.us

about us



T-CON™

In the world of construction, where the foundations of the future are being forged today, there is one company that has left its mark for more than two decades. T-CON is not just a company, it is a symbol of innovation, excellence and commitment.

From its origins as a family business since 2010, T-CON has grown and evolved, but has never lost its essence: to **offer the highest quality solutions at every stage of construction.** We don't just manufacture industrialized mortars, we create the future of construction with products that challenge the limits of what is possible.

At T-CON, innovation is our banner, and loyalty to our mission is our driving force. We use **the most advanced raw materials on the market and follow strict quality control,** which allows us to deliver extraordinary results to our customers, day after day. Because we know that in each of our products, in each solution we deliver, something greater is built: trust, security and future.

With presence in Lima - Peru, Canelones - Uruguay, Metropolitan Region - Chile, T-CON not only has a local look, but a global one. **We are constantly expanding, with our sights set on the American continent,** because the world of construction has no borders, and neither do we.

CONCRETE AND NON-ABSORBENT SURFACE PRIMERS



www.t-con.us



Primer P10

Concrete adhesion promoter.

Primer P10 is a concentrated primer to be applied prior to the installation of finishes and cementitious underlayments on porous substrates. It can also be used as a wall and floor treatment following the recommended dilution ratios.



1 Quart / 1.25 Gallons / 5 Gallons

Available at:



Primer NP

Adhesion promoter for non-porous surfaces.

Acrylic primer suitable for use on non-porous surfaces. Interior and exterior use. Provides a rough surface ready for the application of bases and T-CON or traditional finishes. Fast drying and ready to use.



2.2 Lbs. / 8.8 Lbs.

Available at:



GP Additive

Additive to improve the adherence and quality of cementitious mortars and plasters.

GP Additive is a synthetic resin in dispersion. It is used to improve mortars and concretes where high performance is required. It can also be used as an adhesion promoter.



1 Quart / 1.25 Gallons / 5 Gallons

Available at:



Primer EPX

Two-component epoxy adhesion promoter.

Two component epoxy primer for interior and exterior decorative applications of T-CON overlays. Helps minimize cracking in undercoats and topcoats and can be used as a crack filler and with sand coats. Provides secondary downward waterproofing.



2 lbs. (A+B) / 8 lbs. (A+B)

Available at:

CEMENTITIOUS WATERPROOFING



www.t-con.us



WP11 Flex

Single-component flexible cementitious waterproofing mortar.

Single-component cementitious waterproofing mortar formulated with hydraulic cements and modified with polymers. Once applied, it forms a flexible waterproof layer that can withstand positive and negative hydrostatic pressures.



44 lbs.



49 u.

Available at:



WP91 UltraFlex

Single component ultra flexible cementitious waterproofing mortar.

Single-component cementitious waterproofing mortar with high crack bridging capacity, formulated with hydraulic cements and modified with polymers. Once applied, it forms an extra flexible waterproof layer resistant to positive and negative hydrostatic pressures, certified under European standards UNE-EN 1504-2 and UNE-EN 14891.



40 lbs.



49 u.

Available at:



WP Turbo 2K

Two-component ultra flexible cementitious waterproofing mortar.

Rapid-setting, two-component cementitious waterproofing membrane for waterproofing and crack isolation prior to tile installation. Designed to provide a highly crack-bridging, seamless barrier with excellent adhesion and reliable performance under demanding service and temperature conditions.



8.8 lbs. (A)
26 lbs.



2.75 Quarts (B)
2.05 Gallons

Available at:

CONCRETE REPAIR



www.t-con.us



R6

Concrete repair mortar

Cementitious repair mortar for repairing surfaces with a thickness of feather edge to 1/4". Interior or exterior. Formulated based on hydraulic cements. It allows to work on several surfaces and does not slide on vertical surfaces. Excellent workability, it has fibers to provide greater reinforcement.



50 lbs.



49 u.

Available at:



R20 (Grey or White)

Structural concrete repair mortar

Cementitious structural repair mortar for repairing surfaces with thicknesses of 1/4"-1". Interior or exterior. Formulated with hydraulic cements. It allows working on different surfaces and does not slip on vertical surfaces. Excellent workability.



50 lbs.



49 u.

Available at:



MRTI

Ultra-fast hardening industrial repair mortar

Fast drying cementitious mortar for repairing streets, industrial warehouses and other areas of intense traffic that require a fast setting in service, with a high initial resistance. Suitable for light traffic in 2 hours and normal traffic in 6 hours.



50 lbs.



49u.

Available at:

CONCRETE REPAIR



SURFACE PREPARATION



www.t-con.us



M101

Decorative finish skim-coat compound

Self drying decorative finish compound designed to renovate all type of surfaces with a concrete industrial look. Ultra-thin thickness to adhere in all type of surfaces. Wide variety of colours available



10 lbs.



5 u.

Available at:



MEX

Exterior non-slip concrete resurfacing skim-coat compound

Self drying decorative finish compound designed to renovate all type of surfaces with a concrete industrial look. Ultra-thin thickness to adhere in all type of surfaces. Wide variety of colours available. Ideal for exterior surfaces such as sidewalks, driveways and more.



10 lbs.



5 u.

Available at:



M7 Turbo

Rapid setting feather edge patching compound

Fast-setting cementitious skimcoat and patching compound designed to smooth minor surface defects and surface irregularities before floor covering installation. Provides excellent workability, strong adhesion, and durable results for fast-track flooring applications.



10 lbs.



5 u.

Available at:

SELF-LEVELING FLOORINGS FOR COMMERCIAL AND RESIDENTIAL USE



CONCRETE ANCHORING AND BACKFILLING



www.t-con.us



F10

Premium self-leveling overlayment for commercial and residential use

Grey decorative smooth finish self-leveling topping. Suitable for a variety of interior and exterior substrates. Formulated with hydraulic cements. Allows to level surfaces and at the same time to be used as a final overlay.



50 lbs.



49 u.

Available at:



F11

Premium light gray cementitious self-leveling for commercial and residential use

Light gray decorative smooth finish self-leveling topping. Suitable for a variety of interior and exterior substrates. Formulated with hydraulic cements. Allows to level surfaces and at the same time to be used as a final overlay. Allows to be toned with different colors.



50 lbs.



49 u.

Available at:



Grout G601

General purpose expansive anchor grout

High-strength premixed cementitious mortar with controlled granulometry, with expansive properties for anchoring and/or filling structures, machinery, among others. Free of chlorides and metallic components, certified under European standard UNE-EN 1504-6.



50 lbs.



49 u.

Available at:



SELF-LEVELING UNDERLAYMENTS



www.t-con.us



L50

Contractor grade self leveling underlayment.

Regular-setting calcium aluminate-based self leveling underlayment. Suitable for a wide variety of substrates. Formulated with hydraulic cements. It allows leveling surfaces at thicknesses from 1/4" to 1-1/2" , enabling the subsequent installation of coverings such as vinyl flooring, laminate floors, wood floors, engineered wood, carpet (moquette), etc.



50 lbs.



49 u.

Available at:



L15

Self-leveling underlayment.

Rapid-setting calcium aluminate-based self leveling underlayment. Suitable for a wide variety of substrates. Formulated with hydraulic cements. It allows leveling surfaces at thicknesses from feather edge to 1" , enabling the subsequent installation of coverings such as vinyl flooring, laminate floors, wood floors, engineered wood, carpet (moquette), etc.



50 lbs.



49 u.

Available at:



LX8

Premium high-performance self leveling underlayment.

Premium high strength and highly flowable calcium aluminate-based self leveling underlayment. Suitable for a wide variety of substrates. It allows leveling surfaces from feather edge thicknesses up to 1" , allowing to place later coatings such as vinyl floors, laminates, wood floors, engineered wood, moquette, etc. Suitable for light traffic after 2 hours.




50 lbs.



49 u.

Available at:

CEMENTITIOUS TILE ADHESIVES

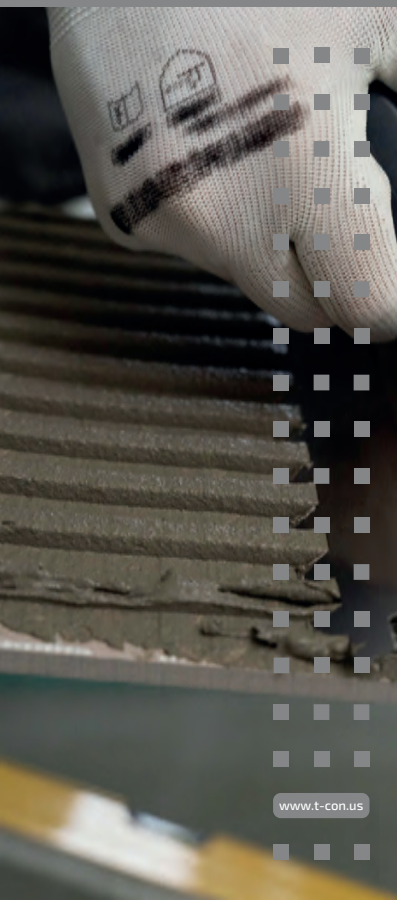

www.t-con.us



T5 Porcellanato C2

Standard tile thin set mortar

Cementitious adhesive mortar with excellent workability and high adhesion for indoor and outdoor placement of all types of ceramic and porcelain tiles.



50Lbs.



49u.

Available at: 



T6 Flex C2TE (Grey or White)

Premium polymer modified thin set mortar

Cementitious adhesive mortar with excellent workability, medium transversal deformation (flexibility), reduced vertical slip, extended open time and high adhesion for interior and exterior installation of all types of ceramic and porcelain tiles. Suitable for installation on radiant slabs and on existing ceramic or porcelain tiles.



50Lbs.



49u.

Available at: 



T11 Superflex C2TES1 (Grey or White)

Premium tile mortar for large and heavy format S1

Cementitious adhesive mortar with excellent workability, high transversal deformation (flexibility), reduced vertical slip, extended open time and high adhesion for interior and exterior installation of all types of ceramic and porcelain tiles. Suitable for laying on radiant slabs and on existing ceramic or porcelain tiles. It can be used in large formats.



50Lbs.



49u.

Available at: 

CEMENTITIOUS TILE ADHESIVES

LITEBOND TECHNOLOGY

www.t-con.us



T55 Superflex Pro S2

Premium high performance tile mortar for large and heavy format S2

Highly deformable, polymer-modified cementitious tile adhesive designed for demanding installations subject to movement, vibration, or thermal variation. Provides excellent workability, smooth troweling, and high adhesion for precise tile placement and durable performance on walls and floors, including wet areas and underfloor heating systems.



50 lbs.



49 u.

Available at:



Superflex Litebond S1

Lightweight premium tile mortar for large and heavy format S1

Lightweight, polymer-modified, deformable (S1) cementitious tile adhesive offering excellent workability, smooth troweling, and high adhesion. Designed to deliver higher coverage, easier handling, and reliable performance for ceramic, porcelain, and large-format tile installations on walls and floors, including wet areas and underfloor heating systems.



33 lbs.



49 u.

Available at:



Superflex Litebond S2

Lightweight premium high performance tile mortar for large and heavy format S2

Lightweight, highly deformable (S2) cementitious tile adhesive engineered for demanding installations with movement or thermal stress. Provides high coverage, excellent workability, and superior adhesion for large-format tile applications including wet areas and underfloor heating systems.



33 lbs.



49 u.

Available at:

T-CON INNOVATION IN
CONSTRUCTION

20 years of experience, a legacy of innovation and
a relentless commitment to quality.

Are you ready to build the future with us?

www.t-con.us

 **CHILE**

info@t-con.cl

WWW.T-CON.CL

Lampa, Region
Metropolitana.

 **PERÚ**

info@tcon.pe

WWW.TCON.PE

San Juan Bautista
de Villa, Chorrillos,
Lima.

 **URUGUAY**

info@tcon.uy

WWW.TCON.UY

Aeroparque,
Canelones.

 **UNITED STATES**

contact@t-con.us

WWW.T-CON.US

T-CON